

Smoke Sensor SS-01




It is a NO / NC sensor that senses the smoke generated in flammable, flameless fires in closed spaces and produces a dry contact output

Technical Specifications


Voltage	12 VDC
Operating Temperature	0 / +50 °C
Humidity Range	%0 - %90(Non-Condensing)
Product Warranty	2 Years
Protection Class	IP 40
Communication Protocol	On / Off Dry Contact
Current Consumption	< 40mA

It is important that the smoke sensor is installed at the proper location for efficient operation. The smoke sensor (SS-01) should be installed in an area in the open space where it will not be exposed to direct air flow. (Example: ceiling, wall etc.)



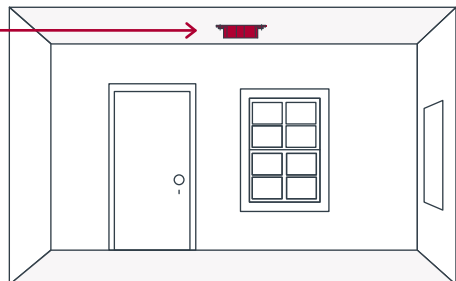


Smoke Sensor SS-01

Sensor Connection

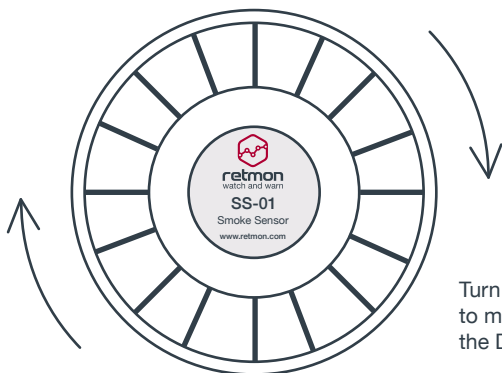

Turn the back cover of the sensor clockwise to make the cable connection between the DCT200 and the Smoke Sensor.

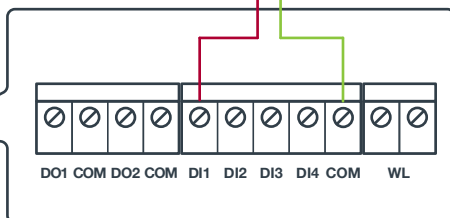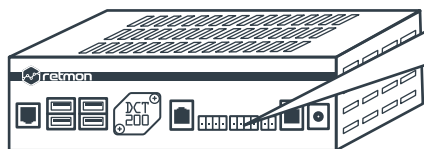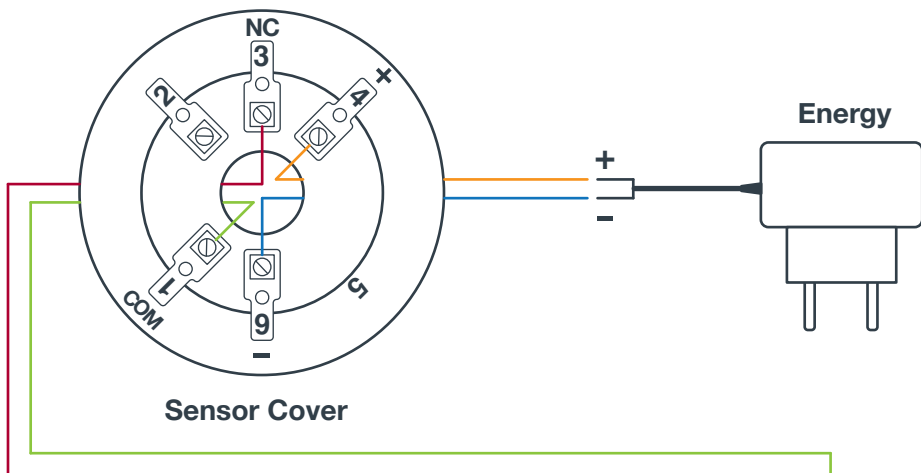

You can connect the Normally Closed contact of the sensor to any of the Digital Inputs.